


# DIAMOND-TOPP™

A high performance top-coat system developed for heavy-duty environments requiring maximum abrasion resistance. Diamond-Topp™ may be incorporated over any HP Spartacote® floor coating and will leave a lightly textured matte finish.



- Parking Garages
- Warehouses
- Distribution Centers
- Manufacturing Facilities
- Walk-Ways & Concourses
- Automotive Service & Repair

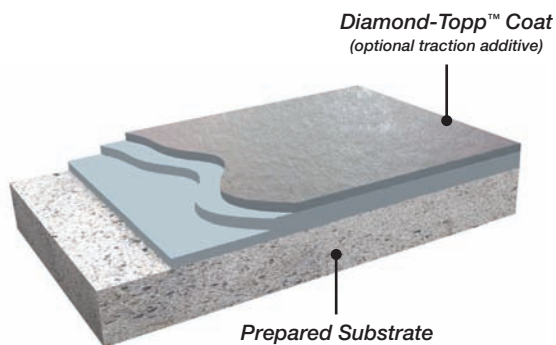

# DIAMOND-TOPP™

## SYSTEM FEATURES & BENEFITS:

- Superior abrasion resistance
- Maintenance-friendly
- Textured non-slip surface
- High chemical and stain resistance
- Matte finish
- May be used as a top-coat over any HP Spartacote® system
- Stain resistant

SYSTEM	OVERALL THICKNESS	APPLICATIONS
DIAMOND-TOPP™ SURFACE COAT	4 mils DFT	Heavy-duty environments requiring maximum abrasion resistance. Projects requiring a matte finish.



CURED SYSTEM PROPERTIES	DIAMOND-TOPP™
Coefficient of Friction (ASTM C-1028)	dry: 0.86 wet: 1.02
Hardness (ASTM D 2240):	94
Abrasion Resistance (ASTM D-4060 mg loss):	22
Texture	200-grit sandpaper
Substrate Adhesion (ASTM D-4541, psi)	400-500+, concrete fracture
Flammability: (ASTM D-635)	self extinguishing

For Additional Information call: 866-966-1DAY(1329) Or email: [contact@hpspartacote.com](mailto:contact@hpspartacote.com)

**HP Spartacote® Inc.**

810 Brickyard Circle #1 | Golden, CO 80403 | [www.hpspartacote.com](http://www.hpspartacote.com)